



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

UPDATE PRODUK ALAT LAB – READY STOCK PER 26 FEBRUARI 2025

1. PRODUK AQUALABO

NO	NAMA BARANG	JUMLAH STOCK
1	HEATING REACTOR 24 PLACES AQUALABO – FRANCE , Catalog Number . 1RD010 Description : Heating Block : Aluminium Power : 550 W , Voltage : 230 V Number Of Locations : 24 Temperature Selection : 100 / 120 / 150 °C Dia Tubes : 16 mm 	1 UN
2	JAR TEST / FLOCCULATOR 4 PLACES WITH CENTRAL LIGHTING AQUALABO - FRANCE Catalog Number. FIS0100 Description : Number Of Places : 4 Capacity : Jar 1 Liter Speed : From 10 TO 400 Rpm , With 1 Rpm Step Timer : From 10 To 3600 Sec, 	1 UN
3	SPECTROPHOTOMETER VISIBLE SINGLE BEAM 10 NM PRIM LIGHT AQUALABO - FRANCE Catalog Number . 70CI0377 Description : Spectral Range : 330-900 Nm Bandwidth : 10 Nm , Accuracy : $\pm 1,5 \%$ Light Source : Halogen Lamp Detector : Silicon Diode Cell Holder : 1 Cuvette 10 Mmv Photometric Range : -0.3 Abs ; 0-200 % T 	2 UN
4	SPECTROPHOTOMETER VISIBLE SINGLE BEAM 10 NM PRIM ADVANCED AQUALABO Catalog Number: 70CI0381 Description : Spectral Range : 330-900 Nm Bandwidth : 10 Nm , Accuracy : $\pm 1,5 \%$ Light Source : Halogen Lamp Detector : Silicon Diode Cell Holder : 1 Cuvette 10 Mmv Photometric Range : -0.3 Abs ; 0-200 % T 	0



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

5	UVILINE 9300 - SPECTROPHOTOMETER VISIBLE REFERENCE BEAM 4 NM - AQUALABO – FRANCE Catalog Number : 70VI0501A Description : Wavelength range : 320-1100 nm Light Source : Halogen Bandpass : 4 nm Incremental WL step : Reading: 0.1 nm, Setting: 1 nm Wavelength accuracy : ± 1 nm Wavelength repeat-ability : $\pm 0,5$ nm Absorbance range : ± 3.500 Abs		0
6	UVILINE 9600 - SPECTROPHOTOMETER VISIBLE REFERENCE BEAM 4 NM - AQUALABO – FRANCE Catalog Number : 70VI0511A Description : Wavelength range : 190-1100 nm Light Source : Xenon Bandpass : 4 nm Incremental WL step : Reading: 0.1 nm, Setting: 1 nm Wavelength accuracy : ± 1 nm Wavelength repeat-ability : $\pm 0,5$ nm Absorbance range : ± 3.500 Abs		0
7	PHOTOPOD VERSION FULL SP (TABLET REAGENT LIQUID) Catalog Number. NA-0RC-C00239 With : Accessories Kit For Photopod Catalog Number. NA-ACC-C-00016		1 UN
8	MULTIPARAMETER PHOTOMETER PHOTOPOD MIX Catalog Number : PF-POR-C-00175		0
9	MULTIPARAMETER PHOTOMETER PHOTOPOD MIX + ODEON 1 INLET + SUITCASE Catalog Number : NC-POR-C-00299		0
10	MULTIPARAMETER PHOTOMETER PHOTOPOD MIX + ODEON 2 INLET + SUITCASE Catalog Number : NC-POR-C-00304		0
11	MULTIPARAMETER PHOTOMETER PHOTOPOD MIX + PC CONNECTION BOX Catalog Number : NC-POR-C-00301		0
12	PASTEL UV- PORTABLE MULTIPARAMETER UVANALYSER Catalog Number : 70MP0316 Description : Spectral range : 200 to 350 nm Measuring cuvette : 2 optical paths: 5 and 10 mm Weight : 9 kg Dimensions : 40 x 40 x 40 cm		0



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

	Output : Display screen (64 x 128 pixels) RS232C Bidirectional Power supply : Internal Battery 100 readings External 1 10/240V / 50/60 Hz Power : 35 W	
13	NEON_ PORTABEL OXIMETER WITH OPTOD3M OPTICAL STAINLESS STEEL OXYGEN SENSOR Catalog Number : PF-POR-C-00151 Description : Measuring range : Oxygen: 0,00 to 20,00 mg/L ; 0,00 to 20,00 ppm : 0-100% Temperature: 0,00 – 50,00 °C, Atmospheric pressure: 450-800 mmHg (600-1065 hPa) Resolution : Oxygen: 0,01, Temperature: 0.01 Accuracy : Oxygen: +/- 0,1mg/L; +/- 0,1ppm; +/- 1 %, Temperature: +/- 0.5 °C, Oxygen calibration : On 1 or 2 points 	0
14	NEON_ PORTABLE PH/ORP/TEMP METER WITH 3 M PHEHT SENSOR Catalog Number : PF-POR-C-00160 Description : Measuring range : pH: 0.00 to 14.00 (compensated at 25°C), Redox: -1000.0 to +1000.0 Mv, Temperature: 0.00 – 50.00°C Resolution : pH: 0.01 l Redox: 0.1 Mv, Temperature: 0.01°C Accuracy : H: +/- 0.1 pH l Redox: +/- 0.2 mV l Temperature: +/- 0.5°C pH calibration : On 3 points 	0
15	NEON_ PORTABLE CONDUCTIVITY METER WITH 3 M C4E SENSOR Catalog Number : PF-POR-C-00165 Description : Measurement Range : Konduktivitet: 0–200,0 µS/cm; 0–2000 µS/cm; 0,00–20,00 mS/cm; 0,0–200,0 mS/cm (kompenserad vid 25°C) Salthalt: -5–60 g/kg Temperatur: 0,00–50,00°C Accuracy : Conductivity: ±1% of full scale (for readings above 100 mS/cm, a suitable buffer solution should be used) Temperature : ±0.5°C 	0
16	NEON_ PORTABLE SLUDGE BLANKET METER WITH 3 M VB5 SENSOR Catalog Number : PF-POR-C-00170 Description : Measuring range : Sludge Blanket : 0-100 %, Temperature : 0,00 – 50,00 °C Resolution : Sludge Blanket: 0.01 à 0.1 %, Temperature : 0.01 °C Accuracy : Sludge Blanket : +/- 2%, Temperature : +/- 0.5 °C Sensor VB5 : Optical IR sensor (870 nm) based on absorptiometry Recording : 30 000 points, Wifi transfert 	0



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

17	NEON_PORTABLE TURBIDIMETER WITH 3 M NTU SENSOR Catalog Number : PF-POR-C-00180 Description : Measuring range : Turbidity 5 to 4000 NTU in 5 ranges: 5 - 50 NTU, 5 - 200 NTU, 5 - 1000 NTU, 5 - 4000 NTU AUTOMATIC TSS in mg/l, Temperature: 0,00 - 50,00 °C Resolution : 0,01 to 1 NTU - mg/L, Temperature: 0.01 °C Accuracy : < 5% of the reading (NTU), Temperature: +/- 0.5 °C Sensor NTU : Optical IR sensor (850 nm) based on Nephelometry		0
----	--	---	---

2. PRODUK BEL ENGINEERING

NO	NAMA BARANG	JUMLAH STOCK
1	ANALITYCAL BALANCE MAX: 220 G D: 0.1 MG Catalog Number : MG214AI Weighing Range: 220 G Resolution : 0,0001 G Repeatability : 0,0001 G Linearity : ±0,0003 G Pan Diameter : Ø 80 MM Size : 345X215X345MM Weight : 6,6 KG Plastic Cover	1 UN
2	ANALYTICAL BALANCE MAX: 220 G D: 0.1 MG Catalog Number : M214AI Capacity [MAX] : 220G Resolution [D]: 0,1MG Pan Size : Ø 80 MM Response Time (Sec.) : ≤4 Linearity : ± 0,0003G Repeatability : 0,1MG Verification : [M] Minimum Load : 10 MG Display : Graphic	2 UN
3	HYDROSTATIC BALANCE Catalog Number : M5-ALCODENS Description : Capacity [Max] (balance) : 220 g Readability [d] (balance) : 1 mg Density, relative range : from 0.00 to 2.30 g/cm3 Density, reading precision : 0.00001 Density, accuracy : 0.00005 Volume alcoholic strength : 0-100% V/V Readability : 0.01% V/V Accuracy and repeatability : 0.02% V/V	0



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

4	MICROBALANCE MU SERIES Catalog Number : MU-26i Description : Capacity [Max] : 2,1 g Readability [d] : 0,001 mg Tare Range : - 2,1 g Minimum load according to Directive 2014/31/EU : 0,1 mg Repeatability* : 0,002 mg [weight 1g], 0,003 mg [weight 2g] Repeatability* typical : 0,001 mg [weight 1g], 0,002 mg [weight 2g] Stabilization Time : ≤ 8 s		0
5	MICROBALANCE MU SERIES Catalog Number : MU-66i Description : Capacity [Max] : 6,1 g, Readability [d] : 0,001 mg Tare Range : - 6,1 g, Minimum load according to Directive 2014/31/EU : 0,1 mg Repeatability* : 0,002 mg [weight 2g], 0,003 mg [weight 5g] Repeatability* typical : 0,001 mg [weight 1g], 0,002 mg [weight 2g] Stabilization Time : ≤ 8 s		0
6	MICROBALANCE MU SERIES Catalog Number : MU-126i Description : Capacity [Max] : 12,1g Readability [d] : 0,001 mg Tare Range : - 12,1 g Minimum load according to Directive 2014/31/EU : 0,1 mg Repeatability* : 0,003 mg [weight 2g], 0,004 mg [weight 5g] Repeatability* typical : 0,002 mg [weight 2g], 0,003 mg [weight 5g] Stabilization Time : ≤ 8 s		0
7	MICROBALANCE FOR FILTERS WEIGHING Catalog Number : MU-26i-F Code : BL0654		0
8	MICROBALANCE FOR FILTERS WEIGHING Catalog Number : MU-66i-F Code : BL0655		0
9	MICROBALANCE FOR FILTERS WEIGHING Catalog Number : MU-126i-F Code : BL0656		0
10	UV-M51 UV-VISIBLE SPECTROPHOTOMETER Catalog Number UV-M51 Rentang Panjang Gelombang : 190-1100 nm Pengaturan Panjang Gelombang Rentang Tampilan Fotometrik : 0~200%T, -0,3~3,0A, 0~9999C Lebar Pita : 2NM Kecepatan Pemindaian : 800NM/Menit Akurasi Panjang Gelombang : ±1NM		2 UN



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

11	UV-M90 UV-M90 DOUBLE BEAM SPECTROPHOTOMETER Catalog Number UV-M90 Optical System : Double Beam, Blazed Holographic Grating 1200 LINES/MM Wavelength Range : 190-1100NM Band Width : 1NM Wavelength Accuracy $\pm 0.3\text{NM}$ Wavelength Display : 0.1NM, 0.2NM, 0.5NM, 1.0 NM 2.0NM		2 UN
12	V-M5 SPECTROPHOTOMETER VISIBLE, 325 Catalog Number : V-M5 Description : Optical system : Single beam with CT monochromator 1200 Wavelength Range : 1/mm grating, 325~1000nm Band Width : 4nm Wavelength Accuracy : $\pm 2\text{nm}$ Wavelength Repeatability : 1nm		0
13	MICROBIO-3 UV-VIS MICRO-SPECTROPHOTOMETER Catalog Number : MICROBIO-3 Description : Wavelength range : 200~800 nm Minimum sample size : 0.5~2.0 μL Path length : 0.2 mm 1.0 mm Light source : Xenon flash lamp Detector type : 2048-linear CCD array Wavelength accuracy : 1 nm Spectral resolution : $\leq 3\text{ nm}$		0
14	MICROSCOPE MODEL BIO1B-LED S/N. ITO2300230-31-32-33-34 HS CODE: 9011.80.00 Optical System : Standard Din 160mm System Illumination : Built-In Transmitted Illumination 6v 20w Halogen Bulb Or HIGH Intensity Led Adjustable Intensity Eyepieces : Wide Field Wf10X/18mm Objectives : Achromatic 4X/0.1; 10X/0.25; 40X/0.65; 100X/1.25 (OIL IMMERSION)		5 UN
15	MICROSCOPE MODEL BIO1T S/N. ITO2300235 HS CODE: 9011.80.00 Optical System : Standard Din 160mm System Illumination : Built-In Transmitted Illumination 6v 20w Halogen Bulb Or High Intensity Led Adjustable Intensity Eyepieces : Wide Field Wf10x/18mm Objectives : Achromatic 4X/0.1; 10X/0.25; 40X/0.65; 100X/1.25 (Oil Immersion)		1 UN



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

16	MICROSCOPE MODEL BIO1T-LED S/N. ITO2300236 HS CODE: 9011.80.00 Description : Optical System Standard DIN 160mm System Illumination Built-In Transmitted Illumination 6v 20w Halogen Bulb Or High Intensity Led Adjustable Intensity Eyepieces Wide Field Wf10x/18mm Objectives Achromatic 4X/0.1; 10X/0.25; 40X/0.65; 100X/1.25 (Oil Immersion)		0
17	Moisture Analyzer I-THERMO MODEL A64MG Include : Bank Charges S/N. ITA2304360-59 Display Dot Matrix Graphical Capacity [Max] 60G Resolution [D] 0,1MG Calibration EXTERNAL Pan Size 100MM SAMPLES PAN Repeatability 0,1MG Linearity $\pm 0,0003G$ Response Time (Sec) ≤ 3 Moisture Readability 0,01%		2 UN
18	Moisture Analyzer I-THERMO MODEL G62L Include : Bank Charges Description : Capacity [Max] : 60g Resolution [d] : 0,01g Calibration : External Pan size : 100mm Samples Pan Repeatability : 0,01g Linearity : $\pm 0,03g$ Response time (sec.) : ≤ 3 Moisture Readability : 0,1%		0

3. PRODUK GERHARDT

NO	NAMA BARANG	JUMLAH STOCK
1	DIGESTION UNIT ; KJELDATHERM – KT 40S ; BRAND : GERHARDT Catalog Number : 12-0743 Description : Kjeldatherm – Digestion Unit, With 40 Digestion Tubes, 100ml., Precisa Temperature Control Permits Conditions For The Digestions, To Be Optimized Thus Providing Reproducible results. Digestion Block Made Of Aluminium With Holes For Digestion Tubes. Technical Data : Nominal Voltage : 230v Ac , Frequency : 50/60 Hz Nominal Wattage : 2200 W , Weight : 40 Kg Dimension (W X D X H) : 515 X 483 X 748 Mm , Temperature Max : 430°C Heating Places : 40, Size Of Tube : 100 M	1 UN





PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

2	KJELDATHERM DIGESTION SYSTEM KT-L40S Catalog Number : 12-0745 Description : Nominal Voltage : 230v Ac Frequency : 50/60 Hz Nominal Wattage : 2360 W Weight : 53 Kg Dimension (W X D X H) : 515 X 483 X 728 Mm Temperature Max : 430°C Temperature Accuracy : +/- 0.5 % Heating Places : 8 Size Of Tube : 250/300 Ml Programs : 99 Technical Data : Heating places : 40 Size of tubes [ml] : 300 Temperature max. [°C] : 430 Weight [kg] L: approx. 53		2 UN
3	Vasucog Scubber Unit For Inorganic Digestion Fumes Catalog Number : 12-0779 Merk : Gerhardt - Germany Include : Tabung 2 Pcs Description : Dimensions W/D/H (Mm) : 342/463/490 Closed, 342/463/720 Open Weight (KG) : APPROX. 22 Nominal Voltage (V) : 100* TO 240		2 UN
4	SE8 MA BEAKER 54 X 130 MM, 4 PC. IN BOX Catalog Number : 13-0050 GERHARDT		96 PCS
6	SOXTERM UNIT SOX 416, Catalog Number : 13-0109, GERHARDT GERMANY Include: Laptop Soxterm 1 Set		1 UN
7	KMT Tube 100 ml , L 300mm, 26mm -10 Pcs Catalog Number : 12-0304 Merk : GERHARDT Pack of 10 pcs		20 PCS

4. PRODUK LAUDA

NO	NAMA BARANG	JUMLAH STOCK
1	LAUDA MICROCOOL - Type: MC 600 230; 50/60 HZ : L001048 Include : LWZ 040 Nipple (2 Pcs)	5 UN





PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

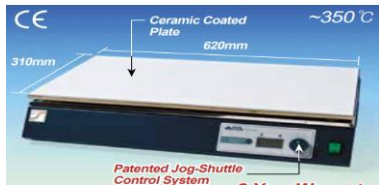
5. PRODUK HEIDOLPH

NO	NAMA BARANG	JUMLAH STOCK
1	HEI-PLATE MAGNETIC STIRRER Model : HEI – TEC Heidolph Magnetic Stirring Hotplate Digital Ref. Number : 505-30000-00 	5 UN

6. PRODUK AUCMA

NO	NAMA BARANG	JUMLAH STOCK
1	COMBINED REFRIGERATOR & FREEZER AUCMA Brand : AUCMA Type : YCD-208 About This Item Refrigerator Chamber : 2~8 oc Freezer Chamber : -26 ~ -10 oc (YCD-208), -40 ~ -20 oc (YCD-288) According To Needs, You Can Close The Refrigerator Chamber Or Freezer Chamber Independently 	1 UN

7. PRODUK DAIHAN

NO	NAMA BARANG	JUMLAH STOCK
1	HEATING MANTLE ANALOG , 6 PLACES 250/500 ML 230V Catalog Number: DH.WHM12293 Description : Ideal For Repetitive Extraction (Kjeldahl, Soxhlet AND Other Extraction Procedure), Reflux And Distillation Laboratory Applications Ideal For Duran / Kimax / Pyrex & Iwaki-Brand Round Flasks 	1 UN
2	HOTPLATE STIRER MULTI, 2X3 POSITION "SMHS"-6 230V Catalog Number : DH.WMH03506 Description : Excellent For Multi-Use And Wide Range Sample Testing Patented Jog-Shuttle Control System * Systemized 3- And 6-Hotplate Stirrer * Independent Heating And Stirring Control * Digital Feedback Control By High-Performance 	1 UN
3	HOTPLATE DIGITAL, LARGE PLATE, CERAMIC HPLP-C-P, 230V Catalog Number : DH.WHP03024 Description : Spec. Models A. "HPLP-C-P" Built-in Controller Plate Surface Ceramic-coated Plate Size 310×620mm Temp. Range & Accuracy Max. 350°C, ±0.3°C at Set Temperature Display Digital LCD with Back-Light Function Dimension & Weight 670×360×h150mm, 16 kg Electrical Reqts. 1 Phase, AC 120 V, 60 Hz or AC 230 V, 50 / 60 Hz 	1 UN



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

4	FORTEX MIXER MIXER MAXSHAKE VM30 V REGULATOR GAS Catalog Number : DH.WVM00031 Description : Speed Range 0 ~ 3,300 Rpm Shaking Motion Orbital, Circuit Orbit : 4.0mm Control Analog Phase Controller Motor Brushless Ac Motor Head (Included) Pop-Off Cup Head And Φ76mm Platform HEAD max. Load 0.5 kg		1 UN
5	500°C HI-TEMP. DIGITAL HOTPLATES STIRER , 80~1,500 RPM, “MaXtir™ MSH500”, Only-Unit, 230V Catalog Number : DH.WMH01500		1 UN
7	FURNACE STANDARD, 1200°C, 4.5LIT. FHX-05, 230V Catalog Number : DH.WFH22.05 Specification : Spec : “FHX-05” Max.Capa. 4.5 Lit, Temp. Range : 300°C ~ 1,200°C Capacity : 4.5 Lit, Heater : Kanthal A1, Expose Wire Heating Elements, 4-Side Heating, Thermocouple : K-type Thermocouple Heating Power : 1.7 kW, Required time to be reached 800°C : 16 min, Timer & Alarm : 99hr 59min (Continuous run), Error status & Timer-end, Display : Digital LCD with Back-Light Function Controller : Digital PID Controller with Jog-Dial Switch (Turn+Push)		1 UN
8	4 LIT BASIC WATER DESTILLATION WCHROMIUM-PLATE STEEL HEATER Catalog Number : SL.WAT201 Specification : Distillate Output : 4 Liters/Hour Quality Of Distillate : Ph / Conductivity : 5.0 ~ 6.5 ph / 3.0 ~ 4.0 μS/cm Resistivity / Temperature : 0.25 ~ 0.30 MΩ·cm / 25 ~35°C Pyrogen Content : Pyrogen Free Water Supply Requirement :1 Liter/Min, Minimum 3psi (0.2Bar) Dimensions (W×D×H), Weight : 500×150×h450 mm, 5.25kg		1 UN
9	MINI VORTEX MIXER, VM-100 , FOR 230V, BLUE SILICON HEAD Catalog Number : DH.WVM0100.B - Mini Size save the Space of Working Desk - Variable Speed Control and Automatically Press Start - Powerful and Quiet Vortex Mixing Action for Tubes up to 50ml - Blue/Orange Silicon Top Head - Max. Speed : 3,200 rpm - Orbit : 4.5mm - Overall Dimension & Weight(N.W./G.W.) : 55×173×h81 mm, 0.77 / 0.9 kg		1 UN



PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

8. PRODUK THERMO SCIENTIFIC

NO	NAMA BARANG	JUMLAH STOCK
1	CIMAREC+™ STIRRING HOTPLATES SERIES Catalog Number: SP88857105 Specification : Speed : 50 to 1.500 rpm Temperature Range (Metric) : 540 °C (Max Temperature) Surface Area Heating : 7.25 x 7.25 in. Surface Area (Metric) Heating : 18.4 x 18.4cm Top Plate Material : Ceramic , Voltage : 230V Watt : 1056 watt , Hertz : 50/60 Hz	1 UN
2	CIMAREC+™ HOTPLATE SERIES Catalog Number: HP88857105 Specification : Heating Surface 7.25" x 7.25" (18.4 x 18.4 cm) Overall Dimensions 8.2" W x 13" D x 3.8" H (20.8 x 33 x 9.7 cm) Surface Type : Ceramic Electrical 230V 50/60Hz Max Surface Temperature 540°C , Size (inch) 7.25x7.25	1 UN



9. PRODUK SARTORIUS

NO	NAMA BARANG	JUMLAH STOCK
1	BSA ANALYTICAL 120G – 0.1MG – W/EXTERNAL CALIBRATION Catalog Number : BSA124S Specification : Sartorius Bsa124s (External Calibration) Capacity : 120 G X 0.0001 G (0.1mg), Pan Size : Dia 90mm	1 UN
2	BSA ANALYTICAL 220G – 0.1MG – W/EXTERNAL CALIBRATION , Catalog Number : BSA224S Specifications : Sartorius BSA224s (External Calibration) Capacity : 220 G X 0.0001 G (0.1mg), Pan Size : Dia 90mm	1 UN
3	ENTRIS II SERIES CAP.220 G X 0.1 MG EC Model : ENTRIS II Advanced Line Catalog Number : BCE 224-1S Specifications : Kalibrasi : External Calibration Capacity : 220 Gram Readability : 0,0001 Gram (0,1 mg) Diameter Pan : 90 mm , Made In Germany	2 UN
4	ENTRIS II SERIES CAP.220 G X0.1 MG ISOCAL Model : ENTRIS II Advanced Line Catalog Number : BCE224i-1S Specifications : Kalibrasi : Internal Calibration Capacity (g) 220 , Pan Size : Diameter 90mm Chamber Height : 240mm , Made in Germany	1 UN





PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

5	ENTRIS II SERIES CAP. 3.200 G X 10 MG ISOCAL Model : ENTRIS II Advanced Line Catalog Number : BCE3202i-1S Specifications : Capacity : 3200g , Pan size : 7" x 7" Weight : 7.38 , Made In Germany		1 UN
6	BSA TOP LOADING 2200G – 100MG – W/INTERNAL CALIBRATION Model : ENTRIS II Advanced Line Catalog Number : BSA2201-CW Specifications : Sartorius BSA2201 (External Calibration) Capacity : 2200 g x 0.1 g , Pan Size : 180mm x 180mm		1 UN
7	MOISTURE ANALYZER 35G – 1MG Model : ENTRIS II Advanced Line Catalog Number : MA35M-2030N Specifications : Type : MA35M Max. Weighing Capacity : 35g Readability : 1 mg, 0.01% Voltage Frequency : 48-60 Hz Power Consumption : Max. 400 VA		1 UN

10. PRODUK HAMILTON USA

NO	NAMA BARANG	JUMLAH STOCK
1	DUAL SYRINGE DILUTER ADVANCED CONTROLLER Brand : HAMILTON , Origin : USA Serial : ML600DG20272 About This Item - The Dual Syringe Dispenser Has Two Syringe Drives For Applications Such As Animal Dosing That Require The Use Of More Than One Liquid At The Same Time - Country Of Origin :United States - The Two Liquids Can Be Dosed From The Same Instrument Saving Setup And Dosing Time	1 UN





PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

11. PRODUK MEMMERT

NO	NAMA BARANG	JUMLAH STOCK
1	UNIVERSAL OVEN WITH BLOWER FAN Catalog Number : UF110 Brand : MEMMERT, GERMANY Working Temperature Range At Least 5 (Un/Unplus/Unm/Unmplus) Or 10 (Uf/Ufplus/Ufm/Ufmplus) Above Ambient Temperature To +300 °C 3-Side Heating Zone : The Best Temp. Uniformity & Accuracy By High Performance, Heating Mechanism Digital Pid Control System Implementing Superior Temperature Accuracy Optimized Air Flow By Gravity-Air Mechanism • Patented Jog-Dial Control System • Pl(Product Liability) Insurance • Suitable For Drying, Baking, Conditioning, Curing, Pre-Heating And Aging • New Jog-Dial With Push Button	1 UN
2	UNIVERSAL OVEN Model : UN55 Capacity : 53L TEMPERATURE Setting temperature range : +20 to +300°C Setting accuracy temperature : up to 99.9 °C: 0.1 / from 100 °C: 0.5 Temperature sensor : 1 Pt100 sensor DIN class A in 4-wire-circuit STAINLESS STEEL INTERIOR Interior : easy-to-clean interior, made of stainless steel, reinforced by deep drawn ribbing with integrated and protected large-area heating on four sides Dimensions W x H x D in mm : w x h x d : 400 x 400 x 330 mm	4 UN



12. PRODUK CISA

NO	NAMA BARANG	JUMLAH STOCK
1	ELECTROMAGNETIC & DIGITAL SIEVE SHAKER Sieve shaker with 3-d movement.. Model: TZRP200N Description : Suitable For Granulometric Tests, Using Sieves Ø 60, 75, 100, 150, 200 and 203 mm. suitable for both dry And wet sieving kit available. Maximum amplitude Of vibration 2,50mm. Intermittent programming Mode for sieving. Include : The System Cisa-Press Closure With A Closing System Of The Column Of Sieves With Fixtures Bars, Stainless Steel Capacity Up To 8 Sieves Of 50mm Height Or 15 Sieves Of 25mm Height. Dimensions: 445x335x150mm (without sieves). Net weight: 40kg (Without Sieves). Voltage: 230V / 50HZ OR 110V/ 60HZ.	1 UN





PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

13. PRODUK MASKOT

NO	NAMA BARANG	JUMLAH STOCK
1	HEATING MANTLE Specification : Model : AHM-DHM SERIES Capacity : 500 ML Max. Temp : 450 °C Voltage :220 VAC / 50 HZ Power : 250 WATT Exterior Size : DIA. 220 X 165 MM Heating Mode : Surface Heat-Conduction Heating Element : Nichrome Wire Shell (Insulation Layer) : High Quality Aluminum Silicate Cotton Working Mode : Continuous	1 UN



14. PRODUK BOROSIL

NO	NAMA BARANG	JUMLAH STOCK
1	GLASSCARE EQUIPMENT GLASS DRYER Spesifikasi : Parameters : GDS020 SAP Code BLFGGDS02000000000 SAP Description : GLASS DRYER STAND Heater 600W (Finned Heater) Fan 2.4w (Axial Flow) Timer : 0-60 Minutes Dimensions (LXBXH) 385x165x590 mm Weight Of The Product : 7.5 Kg Max Temperature 70C Power Input : AC 200 - 240 V, 50 HZ Max Current ±3A Power Consumption : 750 W Mains , Voltage : 200V-240V AC	2 UN



15. PRODUK GAST

NO	NAMA BARANG	JUMLAH STOCK
1	VACUM PUMP – DOA-P504-BN Oilless Diaphragm Vacuum Pump Model DOA-P504-BN Made In USA Specification : 60 PSI max pressure , 1.1 CFM Open Flow 24,5" Hg Max Vacuum , 1.1 CFM Open Flow Motor : 1/8 HP 220V/50 HZ	2 UN





PT. BENSRA SUKSES INDONESIA

General Supplier & Distributor

16. PRODUK EUTECH - THERMO

NO	NAMA BARANG	JUMLAH STOCK
1	ALAT CONDUCTIVITY / TDS EUTECH CON 150 EUTECH CON 150 (EC-CON150/03K) <u>Product Features</u> <u>Conductivity / Total Dissolved Solids / Temperatur</u> Best Value For An IP67-Rated Waterproof Conductivity Meter • Large, Three Line Lcd – View Conductivity Or Tds Measurement With Temperature As Well As Cell Efficiency • Built-In Memory Function – Stores Up To 150 Measurements Along With Temperature • Adjustable Temperature Cient – Set To 0.0% To Meet Usp Methods For Nob-Compensated Measurements • Power With Aa Bateries Or Use Optional Ac Adapter	2 UN
2	ALAT HAND HELD TDS METER TDS 6+ (ECTDS603PLUSK) <u>Product Features</u> • Multi-Point Push-Button Calibration (Up To 5 Points) With $\pm 1\%$ Full Scale Accuracy • Automatic Or Manual Calibration – For Quick, Easy Calibration; Use Automatic Mode With Preset Calibration Points At Most Popular Values Or Manually Set Values In The Manual	1 UN
3	ALAT HAND HELD PH METER MODEL PH 5+ (ECPH502PLUSK) <u>Product Features :</u> Range 0.00 to 14.00 PH Resolution 0.01 PH Accuracy ± 0.01 PH Calibration 3 POINTS (USA/NIST,PWB) Temperature 0.0 to 100.0 C / 0.1 C Accuracy ± 0.5 C , Battery Life > 500 HOURS (4X1.5 AAA Alkaline Batteries)	2 UN

17. PRODUK HAWS

NO	NAMA BARANG	JUMLAH STOCK
1	EMERGENCY EYE WASH PORTABLE HAWS, 16 GALON (60,6L) HAWS-7500 <u>Specfication:</u> Tinggi 22-1/2', Lebar 21-1/2', Kedalaman 19-1/2' (57,2 X 54,6 X 49,5 cm) Disertifikasi Oleh CSA Untuk Memenuhi Standar ANSI Z358. 1 Untuk Peralatan Pencuci Mata Dan Pancuran Darurat	3 UN